



WAREWASHER UX-50B (MULTI POWER)

Commercial glass- and dishwasher. Rack size 500x500mm and door clearance 380 mm.
Multi-power version. Power configurable to 13/16/20/25 amp option.



WARE WASHING
COMMERCIAL UNDERCOUNTER WAREWASHERS



“Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Peristaltic Detergent Pump.
- ✓ Rinse aid pump.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.

OPTIONAL

- Manual resin regeneration water softener.
- Double-level accessory for washing two baskets at the same time.
- Drainage pump with level sensor. Proactive tank water renewal.

ACCESSORIES

- Manual water softeners
- Automatic water softeners
- 500 x 500 mm baskets
- Inserts & supplements
- High feet kit
- Reverse osmosis devices OS-140
- Double rack kits for AX/UX

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 380 mm

Cycle duration: 90/110/120/180/240"
Production baskets / hour: 40/33/30/20/15

Wash temperature: - 65°C
Rinse temperature: 65°C - 87°C

Boiler capacity: 8 l
Wash tank capacity: 14 l

Consumption and savings

Water consumption/cycle: 2.5 l
Automatic saving mode in: 25'

SALES DESCRIPTION

Sani-Control: guaranteed disinfection.
Embedded bodywork and easy-grip door: hygienic and ergonomic
Exclusive Hydroblade™ washing arms: maximum effectiveness.
3-stage filtering system.
Double-walled body (partial).
Multi-power model.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.



product sheet
updated 28/11/2023



WAREWASHER UX-50B (MULTI POWER)

Commercial glass- and dishwasher. Rack size 500x500mm and door clearance 380 mm.
Multi-power version. Power configurable to 13/16/20/25 amp option.



WARE WASHING
COMMERCIAL UNDERCOUNTER WAREWASHERS

Automatic switch-off: 120'

Loading

Pump: 750 W / 1 Hp
Tank: 1800 W

Total loading: 2550 / 4550 / 5550 W (single phase) / (multipower)

External dimensions (W x D x H)

- ✓ Width: 580 mm
- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Net weight: 57 kg

Noise level (1m.): <69 dB(A)


Crated dimensions

[n:embalaje_ancho] x [n:embalaje_fondo] x [n:embalaje_alto] [m:embalaje_ancho]

AVAILABLE MODELS

| | |
|---------|----------------------|
| 1303222 | UX-50 400/50/3N DD |
| 1303223 | UX-50 220/60/1 DD |
| 1303226 | UX-50B 230/50/1 DD |
| 1303227 | UX-50B 400/50/3N DD |
| 1303230 | UX-50D 400/50/3N DD |
| 1303233 | UX-50BD 400/50/3N DD |
| 1303235 | UX-50BD 230/50/1 DD |
| 1303212 | UX-50B 220/60/1 DD |
| 1303237 | UX-50BD 230/50/1 DD |

* Ask for special versions availability

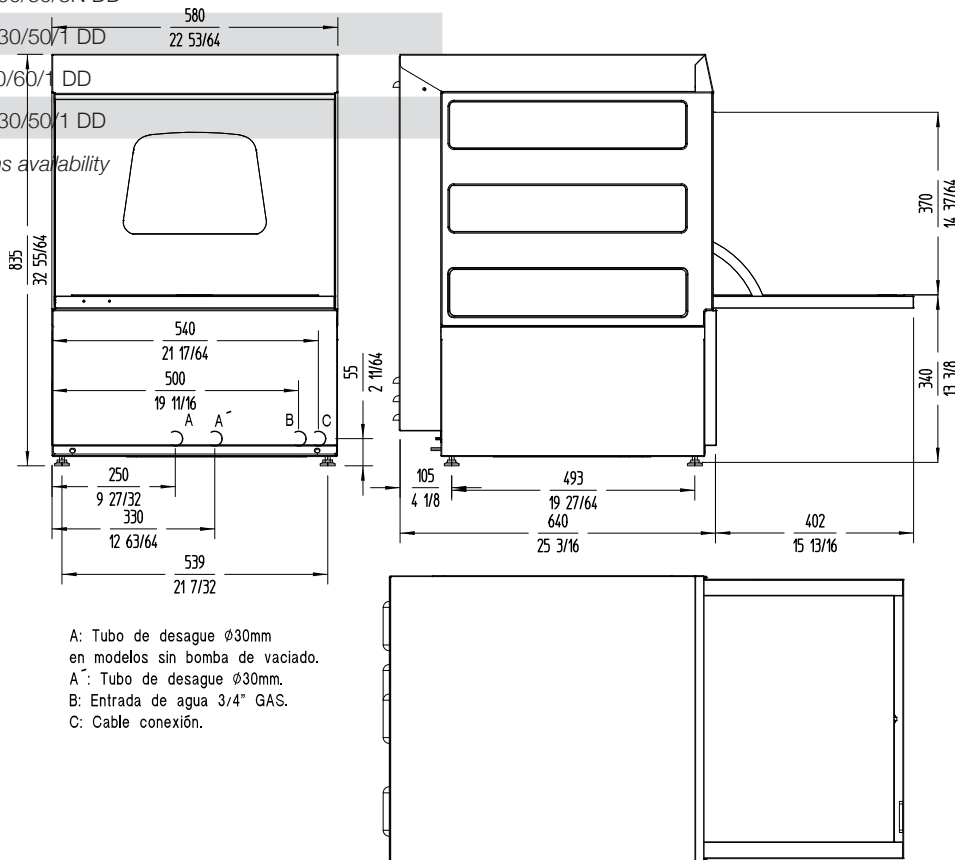

A: Tubo de desague ϕ 30mm en modelos sin bomba de vaciado.
 A': Tubo de desague ϕ 30mm.
 B: Entrada de agua 3/4" GAS.
 C: Cable conexi3n.



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



| | |
|----------|------|
| Project | Date |
| Item | Qty |
| Approved | |

product sheet
updated 28/11/2023